


INSTALLATION GUIDE

Doc ID: 199-4708001
Doc Rev: 040120

INSTALLATION

1. Soak the friction disks in engine oil for 10-15 minutes. Pouring oil into the plastic bag suffices.

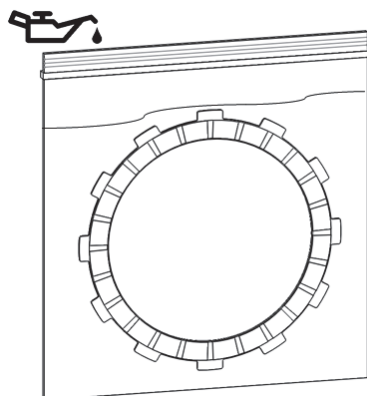

2. Remove your OEM clutch pack – Take note of the clutch pack configuration for reference
3. Install the Rekluse clutch pack as follows:

Contents: 8 Friction Plates – 6 .048in Drive Plates – 1 .060 Drive Plate (Thick)

- A. Install - Friction Disk
 - B. Install - .060in Drive Plate (Thick)
 - C. Install - Friction Disk
 - D. Install - .048in Drive Plate
 - E. Repeat step C and D to install the remaining clutch plates.
 - F. Last plate installed should be a Friction Disk
4. After installation, start the bike and warm it up for a few minutes.
 5. Break the clutch in by performing 8-10 easy roll-on take-offs from a stop. Pump/Modulate the clutch lever while performing the roll-on take-offs.

